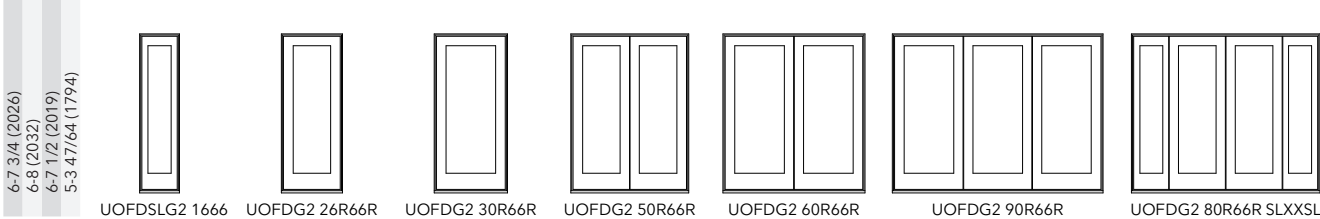


Outswing French Door G2

6-6R Height

MO (mm)	1-8 11/32 (517)	2-7 1/8 (791)	3-1 1/8 (943)	4-11 1/2 (1511)	5-11 1/2 (1816)	8-9 7/8 (2689)	7-10 11/16 (2405)
RO (mm)	1-8 27/32 (529)	2-7 5/8 (803)	3-1 5/8 (956)	5-0 (1524)	6-0 (1829)	8-10 3/8 (2702)	7-11 3/16 (2418)
FS (mm)	1-7 27/32 (504)	2-6 5/8 (778)	3-0 5/8 (930)	4-11 (1499)	5-11 (1803)	8-9 3/8 (2677)	7-10 3/16 (2392)
DLO (mm)	0-11 1/2 (292)	1-6 25/32 (477)	2-0 25/32 (629)	1-6 25/32 (477)	2-0 25/32 (629)	2-0 25/32 (629)	0-11 1/2 (292) 1-6 25/32 (477)



R = Retro Size

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.

Please consult your local Marvin representative for additional mulling configurations.

Please consult your local Marvin representative for masonry openings that include casings and subsills.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

ULTIMATE OUTSWING FRENCH DOOR G2: UOFDG2
ULTIMATE OUTSWING FRENCH DOOR 2 1/4" G2: UOFD225G2

Outswing French Door G2

1 Panel With

MO (mm)	1-8 11/32 (517)	2-1 15/16 (659)	2-7 15/16 (811)	2-9 15/16 (862)	3-1 15/16 (964)	3-7 15/16 (1116)
RO (mm)	1-8 27/32 (529)	2-2 7/16 (672)	2-8 7/16 (824)	2-10 7/16 (875)	3-2 7/16 (976)	3-8 7/16 (1129)
FS (mm)	1-7 27/32 (504)	2-1 7/16 (646)	2-7 7/16 (799)	2-9 7/16 (849)	3-1 7/16 (951)	3-7 7/16 (1103)
DLO (mm)	0-11 1/2 (292)	1-1 19/32 (345)	1-7 19/32 (498)	1-9 19/32 (548)	2-1 19/32 (650)	2-7 19/32 (802)
6-10 1/4 (2089)						
6-10 1/2 (2096)	UOFDSL2 1668	UOFDG2 2068	UOFDG2 2668	UOFDG2 2868	UOFDG2 3068	UOFDG2 3668
6-10 (2083)	UOFD2.25SLG2 1668	UOFD2.25G2 2068	UOFD2.25G2 2668	UOFD2.25G2 2868	UOFD2.25G2 3068	UOFD2.25G2 3668
5-6 15/64 (1858)						
7-2 1/4 (2191)						
7-2 1/2 (2197)	UOFDG2 1670	UOFDG2 2070	UOFDG2 2670	UOFDG2 2870	UOFDG2 3070	UOFDG2 3670
7-2 (2184)	UOFD2.25SLG2 1670	UOFD2.25G2 2070	UOFD2.25G2 2670	UOFD2.25G2 2870	UOFD2.25G2 3070	UOFD2.25G2 3670
5-10 15/64 (1959)						
8-2 1/4 (2496)						
8-2 1/2 (2502)	UOFDG2 1680	UOFDG2 2080	UOFDG2 2680	UOFDG2 2880	UOFDG2 3080	UOFDG2 3680
8-2 (2489)	UOFD2.25SLG2 1680	UOFD2.25G2 2080	UOFD2.25G2 2680	UOFD2.25G2 2880	UOFD2.25G2 3080	UOFD2.25G2 3680
6-10 15/64 (2264)						
9-2 1/4 (2800)						
9-2 1/2 (2807)	UOFD2.25SLG2 1690	UOFD2.25G2 2090	UOFD2.25G2 2690	UOFD2.25G2 2890	UOFD2.25G2 3090	UOFD2.25G2 3690
9-2 (2794)						
7-10 15/64 (2569)						
10-2 1/4 (3105)						
10-2 1/2 (3112)	UOFD2.25SLG2 16100	UOFD2.25G2 20100	UOFD2.25G2 26100	UOFD2.25G2 28100	UOFD2.25G2 30100	UOFD2.25G2 36100
10-2 (3099)						
8-10 15/64 (2874)						

R = Retro Size

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.

Please consult your local Marvin representative for additional mulling configurations.





















Please consult your local Marvin representative for masonry openings that include casings and subsills.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

Outswing French Door G2

2 Panel Width

MO (mm)	4-1 1/8 (1248)	5-1 1/8 (1553)	5-5 1/8 (1654)	6-1 1/8 (1857)	7-1 1/8 (2162)
RO (mm)	4-1 5/8 (1260)	5-1 5/8 (1565)	5-5 5/8 (1667)	6-1 5/8 (1870)	7-1 5/8 (2175)
FS (mm)	4-0 5/8 (1235)	5-0 5/8 (1540)	5-4 5/8 (1641)	6-0 5/8 (1845)	7-0 5/8 (2149)
DLO (mm)	1-1 19/32 (345)	1-7 19/32 (498)	1-9 19/32 (548)	2-1 19/32 (650)	2-7 19/32 (802)

6-10 1/4 (2089) 6-10 1/2 (2096) 6-10 (2083) 5-6 15/64 (1858)					
	UOFD2.25G2 4068	UOFD2.25G2 5068	UOFD2.25G2 5468	UOFD2.25G2 6068	UOFD2.25G2 7068
7-2 1/4 (2191) 7-2 1/2 (2197) 7-2 (2184) 5-10 15/64 (1959)					
	UOFD2.25G2 4070	UOFD2.25G2 5070	UOFD2.25G2 5470	UOFD2.25G2 6070	UOFD2.25G2 7070
8-2 1/4 (2496) 8-2 1/2 (2502) 8-2 (2489) 6-10 15/64 (2264)					
	UOFD2.25G2 4080	UOFD2.25G2 5080	UOFD2.25G2 5480	UOFD2.25G2 6080	UOFD2.25G2 7080
9-2 1/4 (2800) 9-2 1/2 (2807) 9-2 (2794) 7-10 15/64 (2569)					
	UOFD2.25G2 4090	UOFD2.25G2 5090	UOFD2.25G2 5490	UOFD2.25G2 6090	UOFD2.25G2 7090
10-2 1/4 (3105) 10-2 1/2 (3112) 10-2 (3099) 8-10 15/64 (2874)					
	UOFD2.25G2 40100	UOFD2.25G2 50100	UOFD2.25G2 54100	UOFD2.25G2 60100	UOFD2.25G2 70100

R = Retro Size

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.
























Please consult your local Marvin representative for additional mulling configurations.

Please consult your local Marvin representative for masonry openings that include casings and subsills.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

Outswing French Door G2

3 Panel With

MO (mm)	6-0 5/16 (1837)	7-6 5/16 (2294)	8-0 5/16 (2446)	9-0 5/16 (2751)	10-6 5/16 (3208)
RO (mm)	6-0 13/16 (1849)	7-6 13/16 (2307)	8-0 13/16 (2459)	9-0 13/16 (2764)	10-6 13/16 (3221)
FS (mm)	5-11 13/16 (1824)	7-5 13/16 (2281)	7-11 13/16 (2434)	8-11 13/16 (2738)	10-5 13/16 (3196)
DLO (mm)	1-1 19/32 (345)	1-7 19/32 (498)	1-9 19/32 (548)	2-1 19/32 (650)	2-7 19/32 (802)
6-10 1/4 (2089)					
6-10 1/2 (2096)	UOFD2.25G2 6068	UOFD2.25G2 7668	UOFD2.25G2 8068	UOFD2.25G2 9068	UOFD2.25G2 10668
6-10 (2083)					
5-6 15/64 (1858)					
7-2 1/4 (2191)					
7-2 1/2 (2197)	UOFD2.25G2 6070	UOFD2.25G2 7670	UOFD2.25G2 8070	UOFD2.25G2 9070	UOFD2.25G2 10670
7-2 (2184)					
5-10 15/64 (1959)					
8-2 1/4 (2496)					
8-2 1/2 (2502)	UOFD2.25G2 6080	UOFD2.25G2 7680	UOFD2.25G2 8080	UOFD2.25G2 9080	UOFD2.25G2 10680
8-2 (2489)					
6-10 15/64 (2264)					
9-2 1/4 (2800)					
9-2 1/2 (2807)	UOFD2.25G2 6090	UOFD2.25G2 7690	UOFD2.25G2 8090	UOFD2.25G2 9090	UOFD2.25G2 10690
9-2 (2794)					
7-10 15/64 (2569)					
10-2 1/4 (3105)					
10-2 1/2 (3112)	UOFD2.25G2 60100	UOFD2.25G2 76100	UOFD2.25G2 80100	UOFD2.25G2 90100	UOFD2.25G2 106100
10-2 (3099)					
8-10 15/64 (2874)					

R = Retro Size

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.





















Please consult your local Marvin representative for additional mulling configurations.

Please consult your local Marvin representative for masonry openings that include casings and subsills.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

Outswing French Door G2

4 Panel Width

MO (mm)	7-11 1/2 (2426)	9-11 1/2 (3035)	10-7 1/2 (3239)	11-11 1/2 (3645)
RO (mm)	8-0 (2438)	10-0 (3048)	10-8 (3251)	12-0 (3658)
FS (mm)	7-11 (2413)	9-11 (3023)	10-7 (3226)	11-11 (3632)
DLO (mm)	1-1 19/32 (345)	1-7 19/32 (498)	1-9 19/32 (548)	2-1 19/32 (650)
6-10 1/4 (2089) 6-10 1/2 (2096) 6-10 (2083) 5-6 15/64 (1858)	 UOFDG2 8068 UOFD2.25G2 8068	 UOFDG2 10068 UOFD2.25G2 10068	 UOFDG2 10868 UOFD2.25G2 10868	 UOFDG2 12068 UOFD2.25G2 12068
7-2 1/4 (2191) 7-2 1/2 (2197) 7-2 (2184) 5-10 15/64 (1959)	 UOFDG2 8070 UOFD2.25G2 8070	 UOFDG2 10070 UOFD2.25G2 10070	 UOFDG2 10870 UOFD2.25G2 10870	 UOFDG2 12070 UOFD2.25G2 12070
8-2 1/4 (2496) 8-2 1/2 (2502) 8-2 (2489) 6-10 15/64 (2264)	 UOFDG2 8080 UOFD2.25G2 8080	 UOFDG2 10080 UOFD2.25G2 10080	 UOFDG2 10880 UOFD2.25G2 10880	 UOFDG2 12080 UOFD2.25G2 12080
9-2 1/4 (2800) 9-2 1/2 (2807) 9-2 (2794) 7-10 15/64 (2569)	 UOFD2.25G2 8090	 UOFD2.25G2 10090	 UOFD2.25G2 10890	 UOFD2.25G2 12090
10-2 1/4 (3105) 10-2 1/2 (3112) 10-2 (3099) 8-10 15/64 (2874)	 UOFD2.25G2 80100	 UOFD2.25G2 100100	 UOFD2.25G2 108100	 UOFD2.25G2 120100

R = Retro Size

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.

Please consult your local Marvin representative for additional mulling configurations.






Please consult your local Marvin representative for masonry openings that include casings and subsills.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

Outswing French Door G2

4 Panel With

MO (mm)	13-11 1/2 (4255)
RO (mm)	14-0 (4267)
FS (mm)	13-11 (4242)
DLO (mm)	2-7 19/32 (802)

6-10 1/4 (2089)	6-10 1/2 (2096)	6-10 (2083)	5-6 15/64 (1858)		UOFDG2 14068 UOFD2.25G2 14068
7-2 1/4 (2191)	7-2 1/2 (2197)	7-2 (2184)	5-10 15/64 (1959)		UOFDG2 14070 UOFD2.25G2 14070
8-2 1/4 (2496)	8-2 1/2 (2502)	8-2 (2489)	6-10 15/64 (2264)		UOFDG2 14080 UOFD2.25G2 14080
9-2 1/4 (2800)	9-2 1/2 (2807)	9-2 (2794)	7-10 15/64 (2569)		UOFD2.25G2 14090
10-2 1/4 (3105)	10-2 1/2 (3112)	10-2 (3099)	8-10 15/64 (2874)		UOFD2.25G2 140100

R = Retro Size

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.

Please consult your local Marvin representative for additional mulling configurations.

Please consult your local Marvin representative for masonry openings that include casings and subsills.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.